

Technical Data Sheet

Date: 03/11/2022

5x32A CEE N. Angled Panel Mount Socket

Ref. No: 3008-309-1600



Pack Unit

10



Weight

281 gr.




Technical Informations

Quick Connection

Ampere	32A
Voltage	380 - 415 V. AC
Hertz	50 - 60 Hz
Protection Class	IP 67
Clock Postion	6h
Number Of Poles	5 (3P + N + E)
Contact Material	Brass (CuZn)
Housing Material	PA6
Connection Type	Quick
Operation Temp. (-25 / + 40 IEC 60309)	-25 / +80 (1 hour -100° C)

Dimensions

a	83	e	49
b	90	f	59
c	70	g	133
d	76	k	5
Cable Diameter (Min.)	2,5 mm ²	Øh	72
Cable Diameter (Max.)	6 mm ²	M	82
Cable Diameter (Rigid)	2,5 mm ²		
Cable Diameter (Rigid)	10 mm ²		

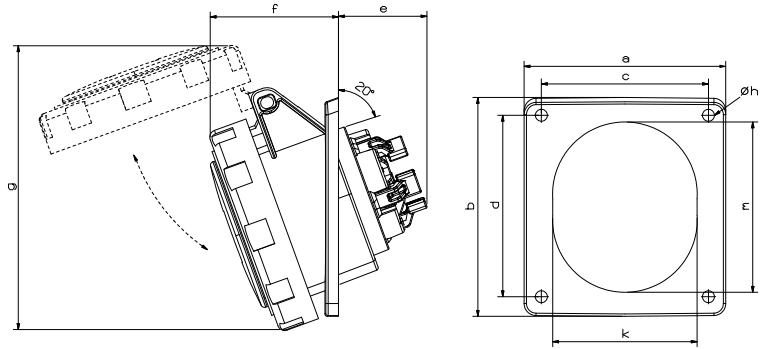

Different Earth Contact Positions (Clock Positions)

3008-309-1100-2h	3008-309-1600-3h	3008-309-0700-4h	3008-309-0300-5h	3008-309-1600	3008-322-0300-7h	3008-309-0900-9h	3008-309-1600-11h



Tel: +90 232 880 90 01
Fax: +90 232 880 90 02



info@tpelectric.com.tr



Kemalpaşa O.S.B. 600 Sk. No:364
35730 Kemalpaşa - İZMİR / TÜRKİYE