

Technical Data Sheet

Date: 03/11/2022

3x16A CEE N. Panel Mount Appliance Inlet (70x70)

Ref. No: 3020-319-0970



Pack Unit

10



Weight

80 gr.



Technical Informations


Quick
Connection

Ampere	16A
Voltage	200 - 250 V. AC
Hertz	50 - 60 Hz
Protection Class	IP 44
Clock Position	6h
Number Of Poles	3 (2P + E)
Contact Material	Brass (CuZn)
Housing Material	PA6
Connection Type	Quick
Operation Temp.	-25 / +80 (1 hour -100° C)
(-25 / + 40 IEC 60309)	

a	70	e	23
b	70	f	44
c	56	Øh	5,5
d	56	Øl	44
Cable Diameter (Min.)	1 mm ²		
Cable Diameter (Max.)	2,5 mm ²		

Dimensions

a	70	e	23
b	70	f	44
c	56	Øh	5,5
d	56	Øl	44
Cable Diameter (Min.)	1 mm ²		
Cable Diameter (Max.)	2,5 mm ²		
Cable Diameter (Rigid)	1 mm ²		
Cable Diameter (Rigid)	4 mm ²		

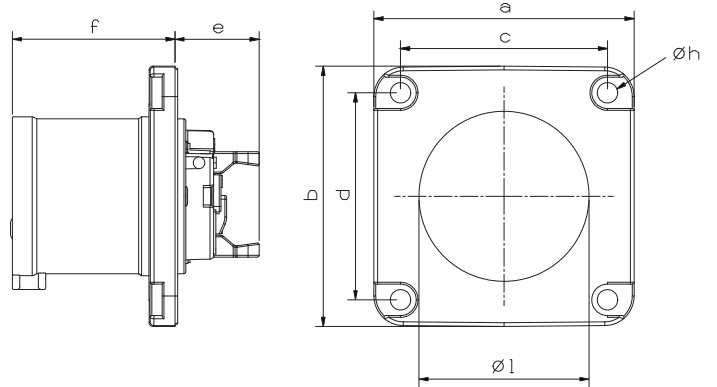

Different Earth Contact Positions (Clock Positions)

 >50V 300-500 Hz 2h	 100-130V 50-60 Hz 4h	 200-250V 50-60 Hz 6h	 480-500V 50-60 Hz 7h	 380-415V 50-60 Hz 9h
3020-301-1101-2h	3020-301-0701-4h	3020-301-0901	3020-301-0301-7h	3020-301-1601-9h



Tel: +90 232 880 90 01
Fax: +90 232 880 90 02



info@tpelectric.com.tr



Kemalpaşa O.S.B. 600 Sk. No:364
35730 Kemalpaşa - İZMİR / TÜRKİYE