

Technical Data Sheet

Date: 03/11/2022

3x32A CEE N. Angled Panel Mount Socket

Ref. No: 3025-309-0900



Pack Unit

10



Weight

207 gr.




Technical Informations

Quick Connection

Ampere	32A
Voltage	200 - 250 V. AC
Hertz	50 - 60 Hz
Protection Class	IP 67
Clock Position	6h
Number Of Poles	3 (2P + E)
Contact Material	Brass (CuZn)
Housing Material	PA6
Connection Type	Quick
Operation Temp. (-25 / + 40 IEC 60309)	-25 / +80 (1 hour -100° C)

Dimensions

a	83	e	43
b	90	f	62
c	70	g	125
d	76	k	5
Cable Diameter (Min.)	2,5 mm ²	Øh	66
Cable Diameter (Max.)	6 mm ²	M	76
Cable Diameter (Rigid)	2,5 mm ²		
Cable Diameter (Rigid)	10 mm ²		

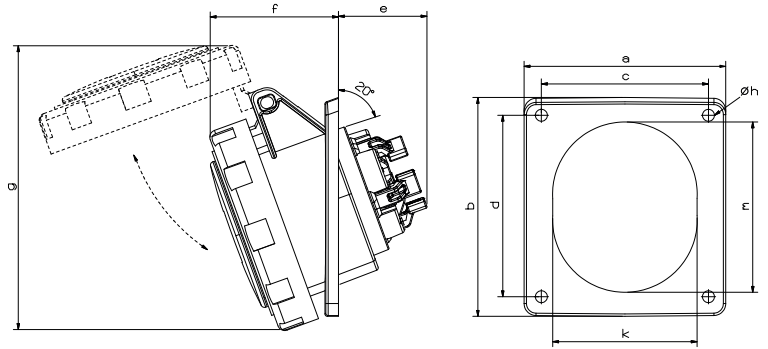

Different Earth Contact Positions (Clock Positions)

 >50V 300-500 Hz 2h 3025-309-1100-2h	 100-130V 50-60 Hz 4h 3025-309-0700-4h	 200-250V 50-60 Hz 6h 3025-309-0900	 480-500V 50-60 Hz 7h 3025-309-0300-7h	 380-415V 50-60 Hz 9h 3025-309-1600-9h
--	--	---	--	--



Tel: +90 232 880 90 01
Fax: +90 232 880 90 02



info@tpelectric.com.tr



Kemalpaşa O.S.B. 600 Sk. No:364
35730 Kemalpaşa - İZMİR / TÜRKİYE